


RESILIENCE.

Engineered for rapid containment in storm surges, hurricanes, floods, and extreme weather events.

EFFECTIVENESS.

Designed to withstand fast moving water and turbulent conditions in emergency situations.

T6 ULTRA HEAVY DUTY SPECIFICATIONS

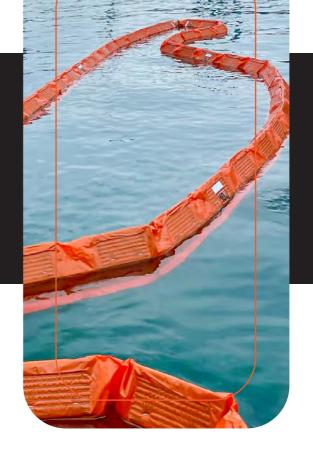

BOOM.

WEIGHT: 1,081 gr/m

HEIGHT: 32 cm

FREEBOARD: 12 cm

DRAFT/SKIRT: 20 cm

TENSION: 1.5 tons

HANDLES: Every 5 m

CONNECTOR: T6 ClickFast Aluminum

CARTRIDGE.

LENGTH: 15 m

PACKAGING: Weatherproof Shell

WEIGHT: 21.455 kg

DIMENSIONS: 60 x 40 x 70 cm

Lightweight System, Heavy Duty Containment.

DISTRIBUTOR INFORMATION:





STOP SPILLS BEFORE THEY SPREAD.